

CTP25 Touch Panel

Introduction

The CTP25 is a cutting-edge touch console specifically designed for meeting control. With its user-centered interactive design and a 10.1-inch touchscreen, users can effortlessly join and manage meetings with ease. Say goodbye to the complexities of video conferencing as CTP25 simplifies the process, delivering an enhanced meeting experience. It seamlessly integrates essential meeting functions, including direct connection to the system, screen sharing, BYOD, and PD charging capabilities. Elevating communication efficiency to new heights.

Device Compatibility

For the maximum number of MeetingBar of CTP25, please refer to [Accessory compatibility list](#).

Installation


Refer to: [CTP25 Installation](#).

Connection

The CTP25 connection of each port can be referred to [CTP25 connection](#). After CTP25 is connected to the Yealink MeetingBar, it can be used for conference and content sharing control. The connection method is as follows.

Direct Connection with an Ethernet Cable

1. Use a network cable to connect the Internet port of CTP25 and the VCH port of Yealink MeetingBar. CTP25 and Yealink MeetingBar will be paired automatically.
2. Synchronize the Yealink MeetingBar account on CTP25 according to the on-screen prompts.

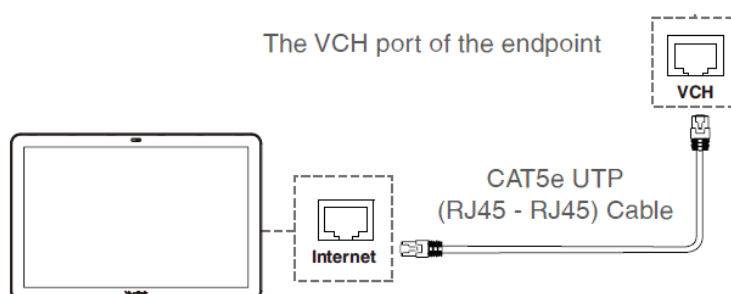


NOTE

To connect CTP25 and accessories such as the VCM35 or VCH51 simultaneously to a Yealink MeetingBar, follow these steps:

1. Connect CTP25 and other accessories to the same POE switch.
2. Use a network cable to connect the POE switch to the Yealink MeetingBar's VCH port.

Connection on the Same LAN**NOTE**

The CTP25 and the Yealink MeetingBar need to be the same LAN.

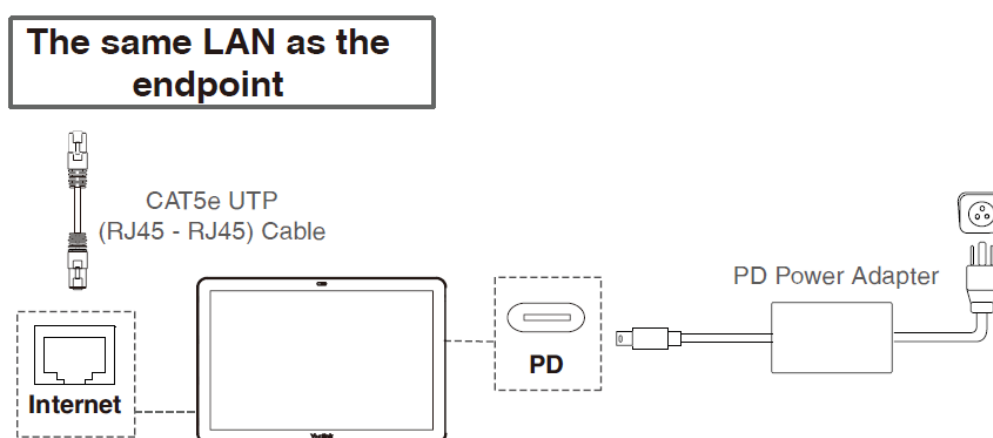

1. Connect CTP25 to a PD power adapter.
2. Connect CTP25 to the same LAN as Yealink MeetingBar.
3. Enter the Yealink MeetingBar IP address and PIN code according to the on-screen prompts in CTP25, then the system will be automatically paired with CTP25.
4. Log in to the account.
 - **Teams mode:** Log in to the same Teams account on both CTP25 and Yealink MeetingBar, enter the code, and select the Yealink MeetingBar according to the on-screen prompts.
 - **Other modes:** Synchronize the Yealink MeetingBar account on CTP25 according to the on-screen prompts.

Update CTP25

Refer to [CTP Firmware Update](#).

Factory resetting

On CTP25, select **More > Settings > Device Settings > System** (default password: 0000) > **Local > Reset to Factory**, and CTP25 will be restored to factory settings.